Omadused



- Innovative concept of decorative air curtain based on a recessed model to be installed free-hanging.
- Kliendi soovil on võimalik kujundada esipaneeli erinevate elemetidega: logodega, valgustusega, kirjadega või ohutus- ja informatiivsete signaalidega.
- Self-supporting casing construction made of galvanized steel plate painted in grey RAL9006. Muud värvid on ka saadaval (soovi korral).
- Inlet and Outlet inbuilt in the same grid painted in white RAL9016. Muud värvid on ka saadaval (soovi korral).
- Anodeeritud alumiiniumist väljalaskeavad, aerodünaamilise vormiga.
- 2-kiiruselise rootormootoriga juhitavad ristvooluventilaatorid, madal müratase.
- "P" type with water heated coil and integrated regulation for ON/OFF or three stages 0-10V proportional valve. “E” tüüp elektriliste varjestatud elementidega, kolm astmed, sisseehitatud reguleerimisvõimalusega."A" tüüp kütteta, ainult ventileerimiseks.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.

Spetsifikatsioonid

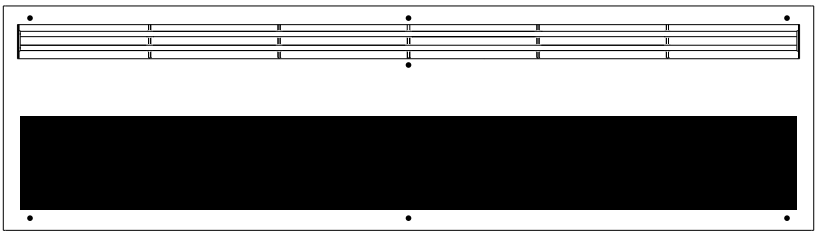
50Hz


Soojenduseta		
Mudel	**Nominaalne Õhuvool** (m³/h)	**Soovitatav Paigalduskõrgus** (m)
TOP 1000 A	1900	3.5
TOP 1500 A	2800	3.5
TOP 2000 A	3800	3.5

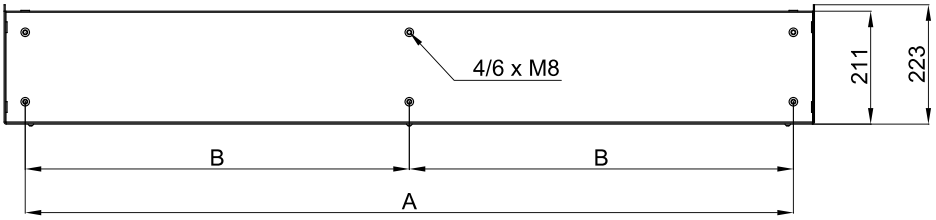
Elektrisoojendus			
Mudel	**Nominaalne Õhuvool** (m³/h)	**Elektriküttevõime 400Vx3** (kW)	**Soovitatav Paigalduskõrgus** (m)
TOP 1000 E	1800	3/6/9	3.5
TOP 1500 E	2650	4/8/12	3.5
TOP 2000 E	3600	6/12/18	3.5

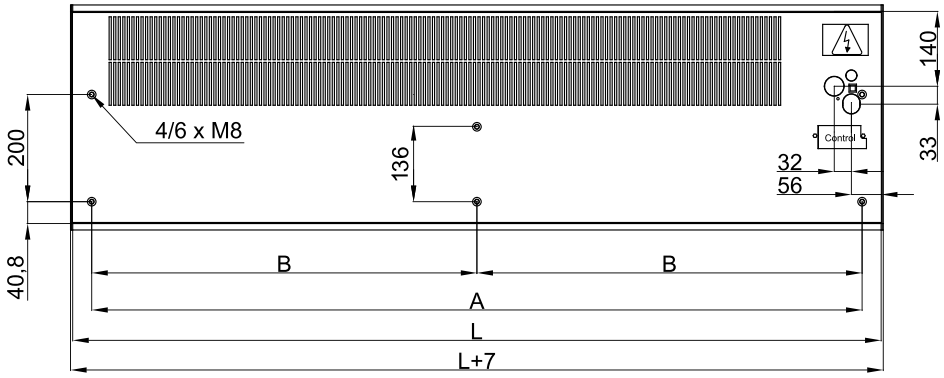
Veesoojendus			
Mudel	**Nominaalne Õhuvool** (m³/h)	**Küttevõime 80/60ºC** (kW)	**Soovitatav Paigalduskõrgus** (m)
TOP 1000 P86	1750	9,28	3.5
TOP 1500 P86	2400	13,65	3.5
TOP 2000 P86	3500	19,26	3.5
TOP 1000 P64	1600	-	3.5
TOP 1500 P64	2200	-	3.5
TOP 2000 P64	3200	-	3.5

Mõõtmed




420


4/6 x M8
211
223
B
B
A


140
4/6 x M8
200
136
Control
32
56
33
40,8
B
B
A
L
L+7